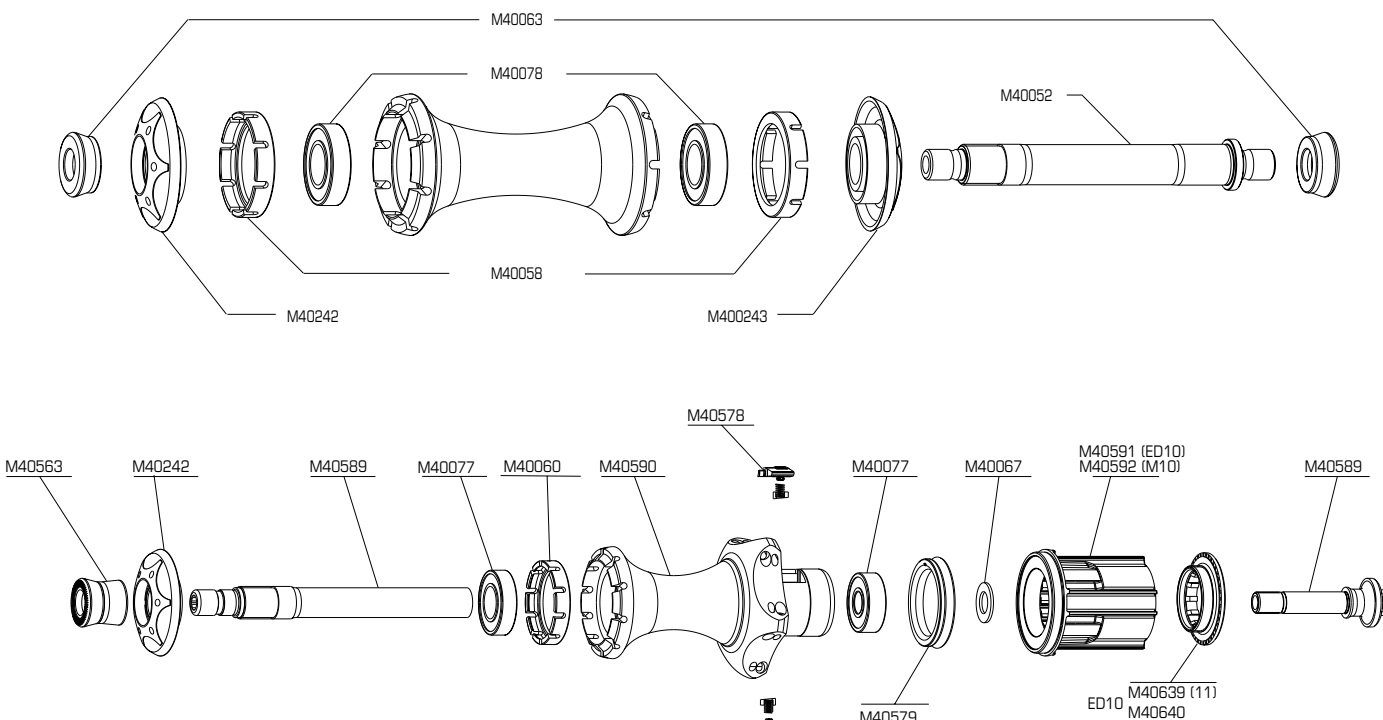


Use : To be used only on a road bike. Any other use (such as on a tandem, mountain bike...) is inadvisable and is the sole responsibility of the user, which voids the Mavic warranty.

WHEEL WEIGHT WITHOUT SKEWER, CLINCHER OR TUBULAR Ø 700 :
 FRONT : 885 g - REAR M10 : 1110 g. - REAR ED10 : 1090 g.
 FRONT TUBULAR Ø 650 : 730 g. - REAR TUBULAR Ø 650 : 995 g.
 WHEEL REFERENCE : Ø 700 FRONT CLINCHER : M23500.
 REAR M10 CLINCHER : M23503.
 REAR ED10 CLINCHER : M23502.
 Ø 700 FRONT TUBULAR : M23600.
 REAR M10 TUBULAR : M23605
 REAR ED10 TUBULAR : M23604.
 Ø 650 FRONT TUBULAR : M23602.
 REAR M9/M10 TUBULAR : M23603.

RIM			
COMMERCIAL REFERENCES	Ø VALVE HOLE	RECOMMENDED TIRE WIDTH AND PRESSURE	MAINTENANCE AND BRAKES
Ø 700 : Front clincher : M40541. Rear clincher : M40542. Front tubular : M40543. Rear tubular : M40544. Ø 650 : Front tubular : M40545. Rear tubular : M40546. Available through the MSC.	 Ø 6,5 mm Valve extender M40012. L ≥ 55mm.	 Ø 700 : Compatible ETRTO. 622 x 13 (clincher). / 633 mm (tubular). Width : see page 4.  Ø 650 : Compatible ETRTO. 584 mm (tubular). See page 4.	Gluing : see page 29. Maintenance : see page 28. Brakes : see page 29. Replacing the rim : see 2000 Technical Manual, pages 19 and 20.

HUBS			
			
MAINTENANCE : Cleaning : Use a dry cloth or soap and water. Do not use pressurized water. Maintenance : see pages 15, 19 and 1999 Technical Manual, pages 38, 43 and 47. Caution : the parts on the free wheel (pawl assembly, springs, free wheel body) FTS L (2001 version) are not compatible with those on the FTS free wheel (2000 version).			

WHEEL BUILDING		
FEATURES	TENSION	MAINTENANCE
QUANTITY PER PACKAGE : 10 spokes + 10 nipples. NIPPLES : front and rear nipples : Nickel plated brass, spherical head, 12 mm. SPOKES : Length and reference : Front / Left Rear Ø 700 : 293 mm / M40648. Right Rear Ø 700 : 307 mm / M40554. Front / Left Rear Ø 650 : 268 mm / M40557. Right Rear Ø 650 : 280 mm / M40558. LACING PATTERN : Front : radial. Rear : 2 cross pattern.	Front : 110 - 130 kg. 100 - 120 divisions (Hozan tensionmeter). Right rear : 130 - 150 kg. 120 - 150 divisions (Hozan tensionmeter).	Lateral and radial truing : see page 20. Replacing the spokes : see 2000 Technical Manual, pages 17 & 18.

ACCESSORIES	
WHEEL DELIVERED WITH : • Front quick release skewer Mavic BR 601 Composite : M40149. • Rear quick release skewer Mavic BR 601 Composite : M40150. • Free play adjustment wrench : M40123. • Instructions and warranty card.	• Rim tape : 16 x 622 mm, 0,6 mm thick : M40107. 16 x 571 mm, 0,6 mm thick : M40254. • Spoke tension wrench : M40001. • Red bag : M40134.